


### SPECIFICATIONS

Current Rating: 1.0A at 30V AC.  
 Contact Resistance: 30m Ω Max  
 Insulation Resistance: 1000M Ω Min  
 Withstanding Voltage: 500V AC for 1 minute  
 Mating Force: 3.57Kgf Max.  
 Unmating Force: 1.02Kgf Min.  
 Housing: PBT, UL94V-0  
 Contacts: Copper Alloy  
 Shell: SPCC

### ORDER INFORMATION


USBA XX X - M04SO

USB A type	B:Black W: White
S0:Gold flash on contact and 100u" MIN Tin on solder tails	
S4:Gold 15u" on contact and 100u" MIN Tin on solder tails	
S5:Gold 30u" on contact and 100u" MIN Tin on solder tails	

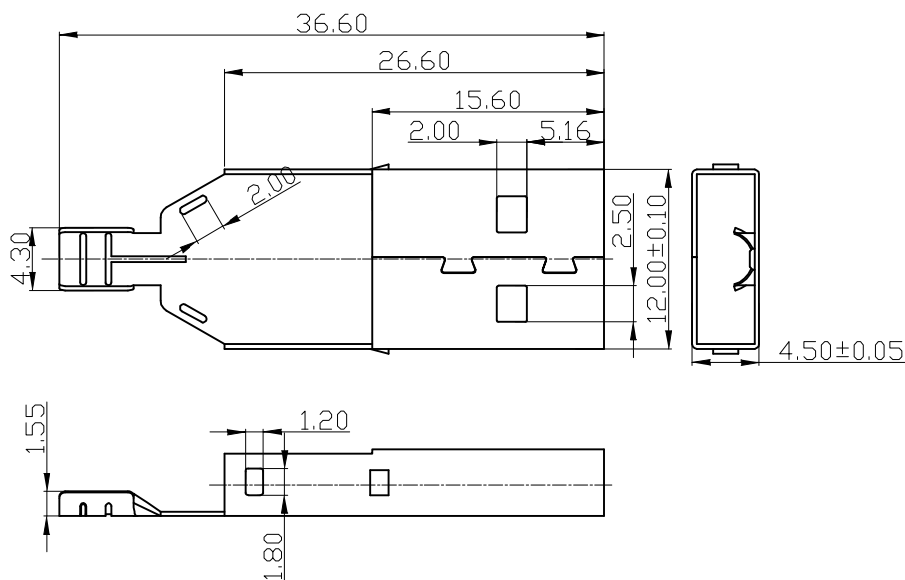

Shell

Back shell

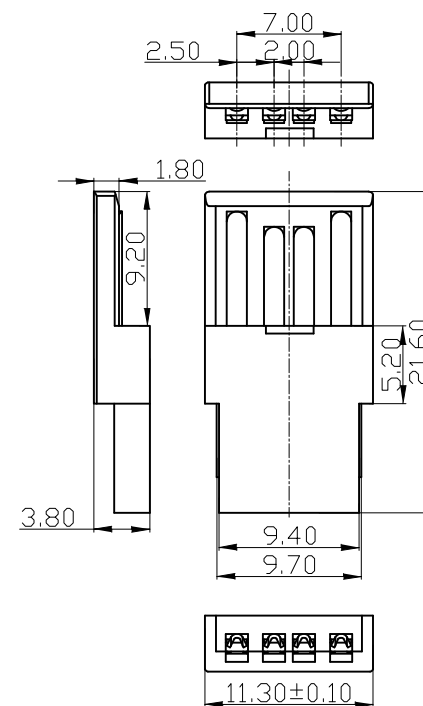

Contact part

	PART NO.	USBAXXX-M04SO	DRAWN	Andrew
	DRAWING NO.	USBAXXX-M04SO	CHECKED	Claudia
	DATE	2016/04/06	APPROVED	Brian
	TITLE:	USB A type Male solder type	REV.	A0

TOLERANCE	.X ±0.25 .XX ±0.20	SCALE	1:1	UNIT	mm
-----------	-----------------------	-------	-----	------	----