

MDCL0093C0-0080R0SHZ DATASHEET



MODEL	MDCL0093C0-0080R0SHZ
--------------	-----------------------------

Version	Revision of historical records
V2019-1 Trial Version	First Edition
V2020-1	Add product signal identification, Modify installation drawing signal identification
V2020-2	Version Update

FEATURES

- Compact, fully enclosed splash proof design
- Highest power performance
- Individually balanced cells
- Over 1,000,000 duty cycles
- Ultra-low internal resistance

APPLICATIONS

- Automotive
- Industrial
- Telecommunications
- Railway transportation
- Uninterruptible Power Supplies(UPS)

SPECIFICATIONS

Electrical	Characteristics
Nominal Capacitance	93 F
Capacitance Tolerance	0% / +20%
Rated Voltage	80 V
Surge Voltage	86.4 V
ESR,DC	≤13.5 mΩ
Maximum Continuous Current (ΔT=15℃)	100 A
Maximum Continuous Current (ΔT=40℃)	160 A
Maximum Peak Current,1sec.	2000 A
Leakage Current(25℃, after 72 h)	26 mA
Cell	CDCL3000C0-0002R7WLH
Number of Cells	32
Environment	
Operating Temperature Range	-40 ℃ ~+65 ℃
Storage Temperature Range	-40 ℃ ~+70 ℃
Environment Humidity	≤90%RH
Physical	
Weight	25 kg
Power Terminals	M8/M10
Recommended Torque-Terminal	20/30 N·m
Vibration Specification	GB/T 11287-2000
Shock Specification	GB/T 14537-1993
Environment Protection	IP54
Monitoring	
Temperature	PT 100 Thermistor
Other Function	Mid-point Voltage Measurement

SPECIFICATIONS

Power And Energy

Usable Power Density (Pd)	2275 W/kg
Impedance Match Power Density(Pmax)	4740 W/kg
Gravimetric Energy Density(Emax)	3.3 Wh/kg
Stored Energy	83.5 Wh

Life

High Temperature Life (at Rated Voltage & Maximum Operating Temperature)	1500 hours
Capacitance Change (%decrease from initial measured value) ESR Change (%increase from specified value)	≤20% ≤100%
Room Temperature Life (at Rated Voltage at 25°C)	10 years
Capacitance Change (%decrease from initial measured value) ESR Change (%increase from specified value)	≤20% ≤100%
Cycle Life (Number of cycles)	1,000,000
Capacitance Change (%decrease from initial measured value) ESR Change (%increase from specified value)	≤20% ≤100%
Shelf Life (25°C, uncharged)	4 years

Safe

Factory High-Pot Test	2500 VDC
-----------------------	----------

NOTES

1. Surge voltage is non-repetitive. The duration must not exceed 1second.
2. Maximum peak current in non-repetitive. The duration must not exceed 1second.
3. Formula of maximum peak current:

$$I_{peak} = \frac{1 / 2CV}{C \times ESR_{DC} + 1}$$

C is rated capacity, V is rated voltage.

4. Formula of power and energy:

Usable Power Density :

$$P_d = \frac{0.12V^2}{ESR_{DC} \times mass}$$

Gravimetric Energy Density:

$$E_{max} = \frac{1 / 2CV^2}{3600 \times mass}$$

Impedance Match Power Density:

$$P_{max} = \frac{V^2}{4ESR_{DC} \times mass}$$

Stored Energy:

$$E = \frac{1 / 2CV^2}{3600}$$

MEASURING METHOD

- 1) Charge and Discharge procedure (Figure 1)
 - a) Charge the capacitor using constant current I to rated voltage V_0 ;
 - b) Keep rated voltage 5 min;
 - c) Discharge the capacitor using constant current I to half rated voltage, record discharge time T_1 during voltage change from V_1 to V_2 ;
 - d) Rest 2-5s, record voltage change ΔV ;
 - e) Discharge it to a very low voltage around 0.01V;
 - f) $V_1 = 80\% V_0, V_2 = 50\% V_0$

2) Capacitance

$$C = I \cdot T_1 / (V_1 - V_2)$$

C: Capacitance(F);

I : Constant Discharge Current(A);

T_1 : Discharge Time(s);

$V_1 - V_2$: Voltage Change (V).

3) DC ESR

$$DC\ ESR = \Delta V / I$$

DC ESR: DC Equivalent Series Resistance(Ω)

ΔV : Voltage Change(V);

I: Constant Discharge Current (A);

4) AC ESR

Measure AC ESR using LCR meter

Frequency: 1 KHz;

Voltage: fully discharge


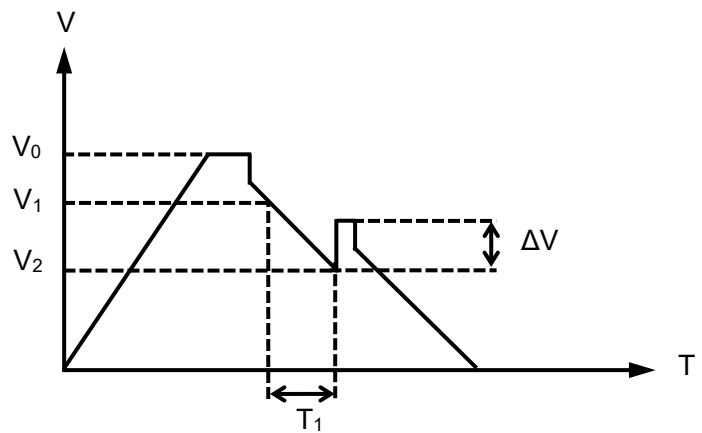


Figure 1

No.	Definition	Remark
1	NC	
2	NC	
3	Temperature signal	PT100
4	Temperature signal	
5	Midpoint voltage (+)	
6	Total negative voltage	
7	NC	
8	NC	

DIMENSIONS

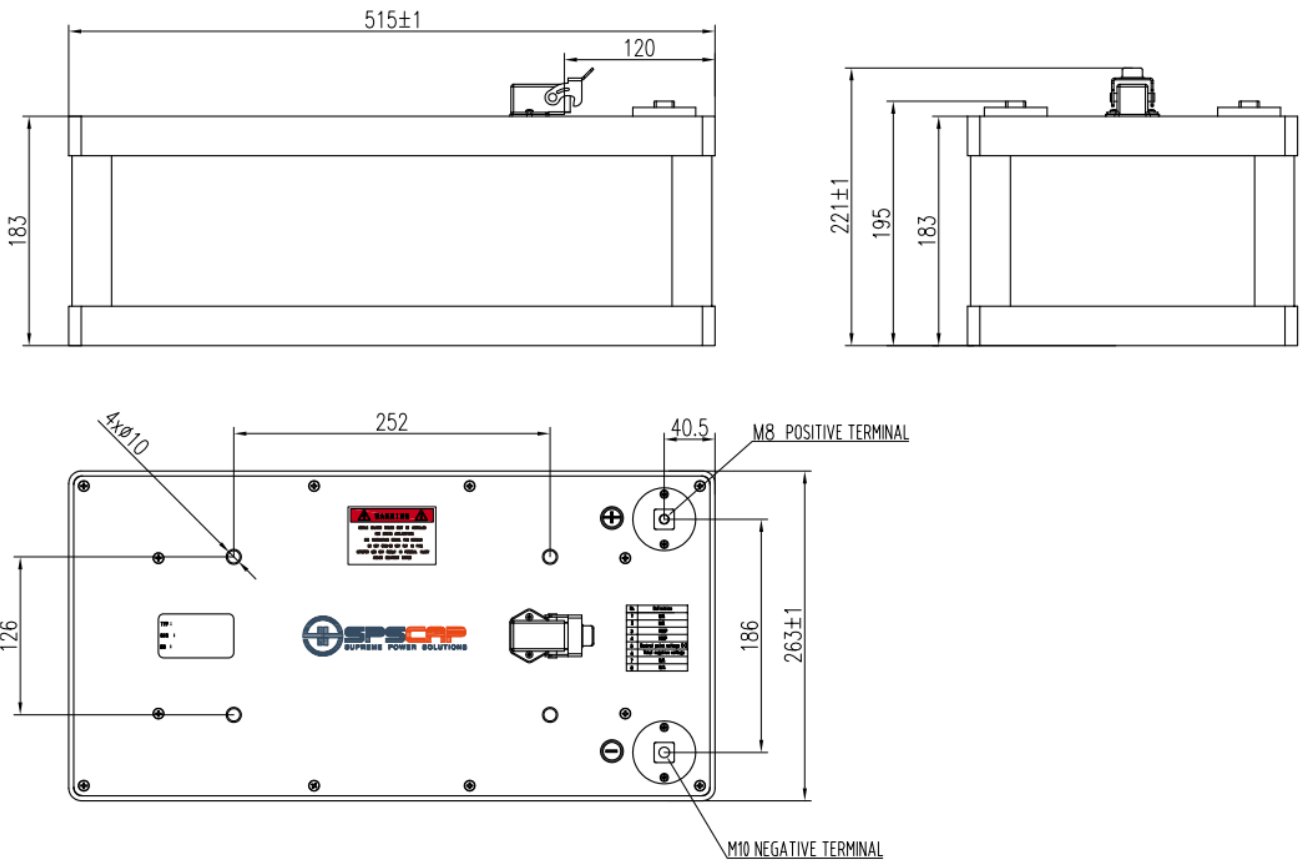

MODEL	Dimension(mm)		
	L(±1)	W(±1)	H(±1)
MDCL0093C0-0080R0SHZ	515	263	221

All rights reserved. Design and specifications are subjected to change without notice.

NINGBO CRRC NEW ENERGY TECHNOLOGY CO.,LTD.

Add: No.199 Shidai Road,Wuxiang Town,Yinzhou District,
Ningbo,Zhejiang,China

Email: info@spscap.com

Website: www.spscap.com

