

SPECIFICATIONS





Current Rating: 1.5A
 Voltage Rating: 30V Max.
 Contact Resistance: 30m Ω Max
 Insulation Resistance: 1000M Ω Min
 Withstanding Voltage: 1000V AC for 1 minute
 Temperature Range: -20°C to +85°C

MATERIAL



Contact: Copper Alloy, Gold plated on contact area
 Insulator: Thermoplastic, UL94V-0, Black/White
 Shell: Steel, Nickel

ORDER INFORMATION

USBA XX X - F04RD - 2

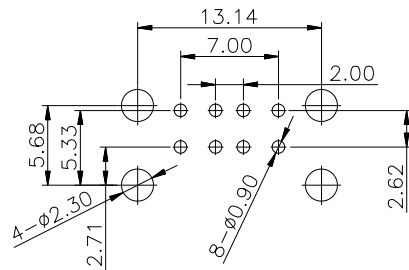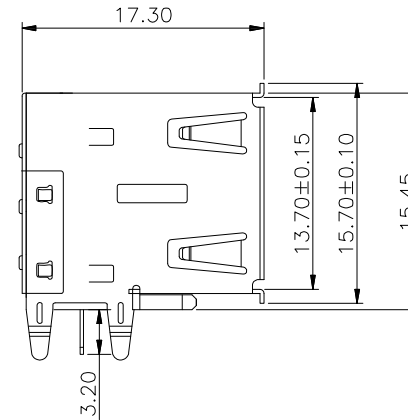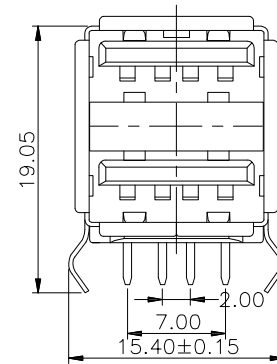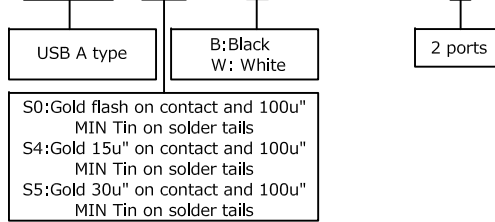

RECOMMENDED PCB LAYOUT

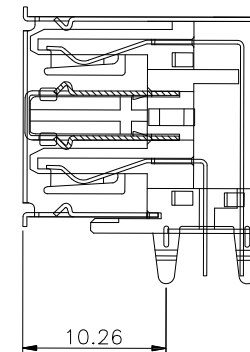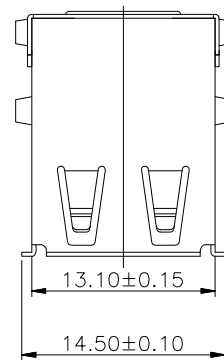

PART NO.	USBAXXX-F04RD-2	DRAWN	Andrew
DRAWING NO.	USBAXXX-F04RD-2	CHECKED	Claudia
DATE	2018/09/18	APPROVED	Brian



Drawing updated

2020/4/3

TITLE: USB A TYPE R/A 2 PORTS REV. A0

TOLERANCE	.X ±0.25 .XX ±0.20	SCALE	1:1	UNIT	mm
-----------	-----------------------	-------	-----	------	----

NO.	DESCRIPTION	DATE
-----	-------------	------