




SPECIFICATIONS

Current Rating: 3A AC,DC
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1000V AC/minute
 Temperature Range: -40°C ~ +105°C



MATERIAL

Insulator: P.B.T, UL94V-0
 Contact: Copper Alloy

ORDER INFORMATION

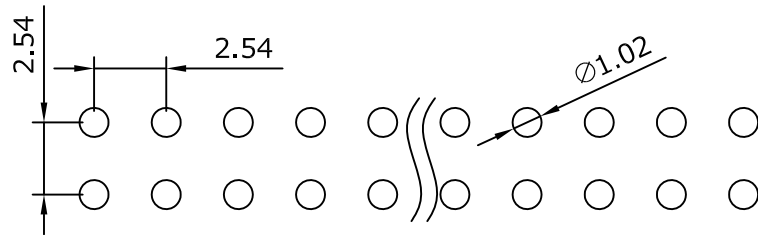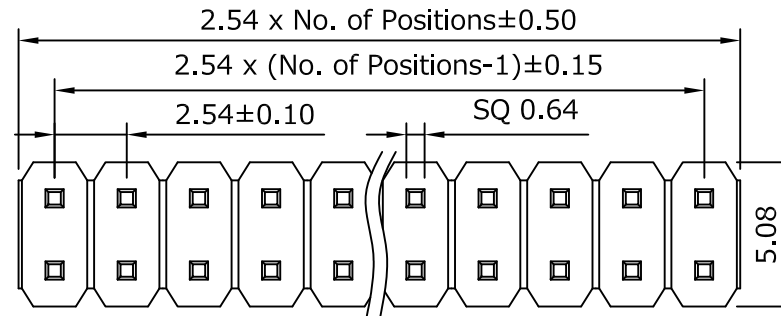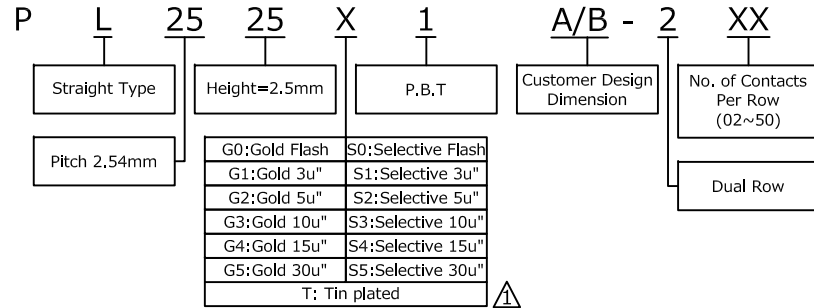

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

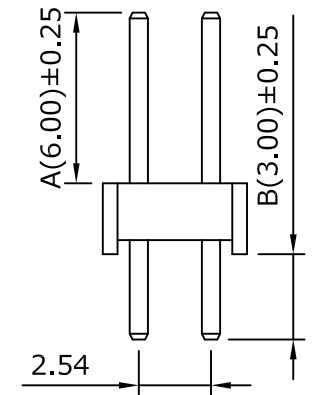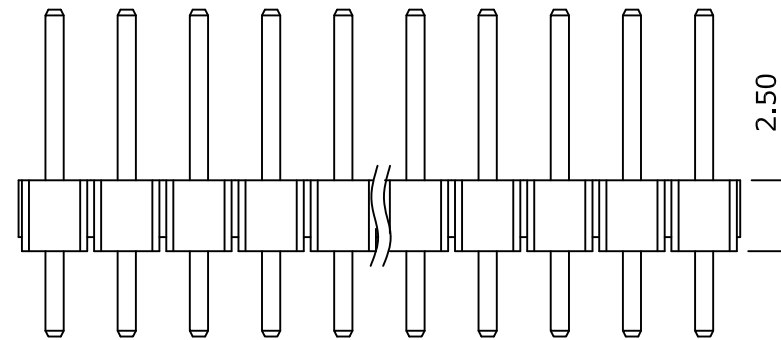

			<p>Morecrafts Tel:+886-2-2966-1326 Fax:+886-2-2966-1352</p>	PART NO.	PL2525X1A/B-2XX	DATE	2005/05/06
				DRAWING NO.	PL2525X1A/B-2XX	DRAWN	Andrew
				CUSTOMER P/N		APPROVED	Brian
△	Added Tin plated option	2017/2/7					
REV.	DESCRIPTION	DATE	TITLE: Pin Header 2.54mm Plastic Height 2.5mm	REV. A	TOLERANCE .X ±0.25 .XX ±0.20	SCALE 1:1	UNIT mm