

## SPECIFICATIONS


Current Rating: 1.5Amps  
 Voltage Rating: 30V AC/DC  
 Contact Resistance: 30m Ω Max  
 Insulation Resistance: 1000M Ω Min  
 Withstanding Voltage: 500V AC for 1 minute  
 Temperature Range: -25°C to +80°C  
 Terminal : Brass  
 Material: PBT, UL94V-0

## ORDER INFORMATION

USBA XX W - F04RVD

USB A type	B: Black W: White
------------	----------------------

S0:Gold flash on contact and 100u" MIN Tin on solder tails
S4:Gold 15u" on contact and 100u" MIN Tin on solder tails
S5:Gold 30u" on contact and 100u" MIN Tin on solder tails

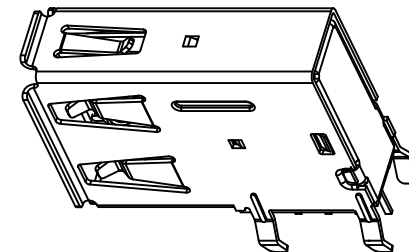

Morecrafts Technology  
 TEL: +886-2-2966-1326  
 FAX: +886-2-2966-1352  
 www.morecrafts.com.tw

PART NO.	USBAXXW-F04RVD	DRAWN	Andrew
DRAWING NO.	USBAXXW-F04RVD	CHECKED	Claudia
DATE	2015/03/11	APPROVED	Brian

TITLE:	USB A type Vertical Dip	REV.	A0	TOLERANCE	.X ±0.25 .XX ±0.20	SCALE	1:1	UNIT	mm	NO.	DESCRIPTION	DATE
--------	-------------------------	------	----	-----------	-----------------------	-------	-----	------	----	-----	-------------	------