

# SPECIFICATION FOR APPROVAL

**Model:** MCP0093C0-0080R0SHZ  
**File Number:** JX-YF-S-132.E  
**File Version:** V2017-1

Supreme Power Solutions Co., Ltd.  
Room 425, Tailai Business Mansion, No.88, Nongda South Rd,  
Haidian District, Beijing, P.R. China  
TEL: +86-400-600-7891  
FAX: +86-10-61272268  
Email: [info@spscap.com](mailto:info@spscap.com)

## Features

- Compact, fully enclosed splash proof design
- Over 1,000,000 duty cycles
- High power density

## Applications

- Wind turbine
- Industrial
- Heavy duty machinery
- Energy storage system



## Specification

### ELECTRICAL

**Nominal Capacitance**

93 F

**Capacitance Tolerance**

0% / +20%

**Rated Voltage**

80 V

**Surge Voltage**

86.4 V

**ESR, DC**

13.5 mΩ

**Maximum Continuous Current (Δ T=15°C)**

100 A

**Maximum Continuous Current (Δ T=40°C)**

160 A

**Maximum Peak Current, 1 sec.**

2000 A

**Leakage Current**

26 mA

**Capacitance of Individual Cells**

3000 F

**Number of Cells**

32

MCP0093C0-0080R0SHZ

### Environment

**Operating Temperature Range**

-40°C to +65°C

**Storage Temperature Range**

-40°C to +70°C

**Environment Humidity**

≤90%RH

### PHYSICAL

**Weight**

25 kg

**Power Terminals**

M8/M10

**Recommended Torque - Terminal**

20/30 Nm

**Vibration Specification**

IEC 255-21-1

**Shock Specification**

IEC 255-21-2

**Environmental Protection**

IP54

### MONITORING / CELL VOLTAGE MANAGEMENT

**Temperature Monitoring**

PT100 Thermistor

**Other Function**

Mid-point Voltage Measurement

### POWER AND ENERGY

**Usable Power Density (Pd)**

2,275 W/kg

**Impedance Match Power Density (Pmax)**

4,740 W/kg

**Gravimetric Energy Density (Emax)**

3.3 Wh/kg

**Stored Energy**

83.5 Wh

LIFE		MCP0093C0-0080R0SHZ
<b>High Temperature</b> (at Rated Voltage & Maximum operating Temperature)		1,500 hours
<b>Capacitance Change</b> (% decrease from initial measured value)		≤20%
<b>ESR Change</b> (% increase from specified value)		≤100%
<b>Room Temperature</b> (at Rated Voltage at 25°C)		10 years
<b>Capacitance Change</b> (% decrease from initial measured value)		≤20%
<b>ESR Change</b> (% increase from specified value)		≤100%
<b>Cycle Life</b> (Number of cycles)		1,000,000
<b>Capacitance Change</b> (% decrease from initial measured value)		≤20%
<b>ESR Change</b> (% increase from specified value)		≤100%
<b>Shelf Life</b> (25°C, uncharged)		4 years
SAFE		
<b>Factory High-Pot Test</b>		2,500 V DC
THERMAL CHARACTERISTICS		
Typical Thermal Resistance		0.12 °C/W
Typical Thermal Capacitance		21,000 J/°C

## Notes

- Surge voltage is non-repetitive. The duration must not exceed 1 second.
- Maximum peak Current is non-repetitive. The duration must not exceed 1 second.
- Formula of maximum peak Current:

$$I_{peak} = \frac{1 / 2CV}{C \times ESR_{DC} + 1}$$

C is rated capacity, V is rated voltage.

- Formula of power and energy

Usable Power Density  $P_d = \frac{0.12V^2}{ESR_{DC} \times mass}$

Impedance Match Power Density  $P_{max} = \frac{V^2}{4ESR_{DC} \times mass}$

Gravimetric Energy Density  $E_{max} = \frac{1 / 2CV^2}{3600 \times mass}$

Stored Energy  $E = \frac{1 / 2CV^2}{3600}$

## Measuring Method

### 1) Charge and Discharge procedure

(Figure 1)

- A) Charge the capacitor using constant current I to rated voltage  $V_0$
- B) Keep rated voltage 5 min
- C) Discharge the capacitor using constant current I to half rated voltage, record discharge time  $T_1$  during voltage change from  $V_1$  to  $V_2$
- D) Rest 2-5s, record voltage change  $\Delta V$
- E) Discharge it to a very low voltage around 0.01V
- F)  $V_1=85\% V_0$   $V_2=50\% V_0$

### 2) Capacitance

$$C = I \cdot T_1 / (V_1 - V_2)$$

C: Capacitance (F)

I: Constant Discharge Current (A)

$T_1$ : Discharge Time (S)

$V_1 - V_2$ : Voltage Change (V)

### 3) DC ESR

$$\text{DC ESR} = \Delta V / I$$

DC ESR: DC Equivalent Series Resistance ( $\Omega$ )

$\Delta V$ : Voltage Change (V)

I: Constant Discharge Current (A)

### 4) AC ESR

Measure AC ESR using LCR meter

Frequency: 1KHz

Voltage: fully discharge




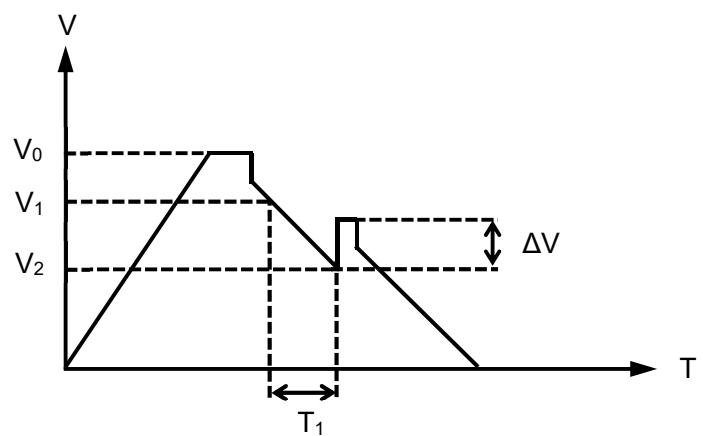


Figure 1

## Dimensions

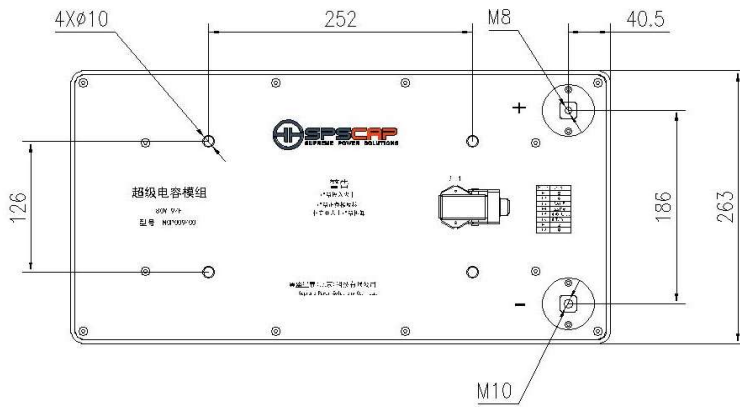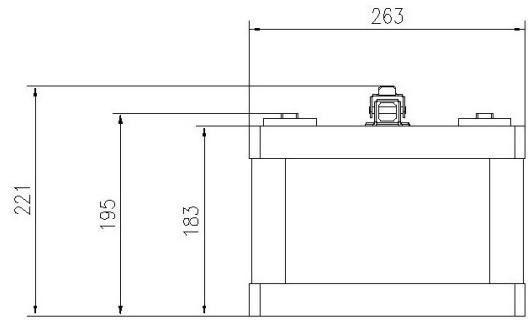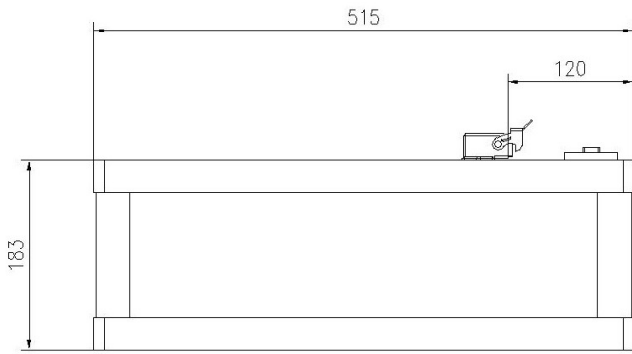

Part Number	Dimension (mm)		
	L (±1mm)	W (±1mm)	H (±1mm)
MCP0093C0-0080R0SHZ	515	263	221