






PIN	A	B	C	D
36	7.65	6.00	25.00	9.15
64	21.65	20.00	39.00	23.15
98	38.65	37.00	56.00	40.15
164	71.65	70.00	89.00	73.15

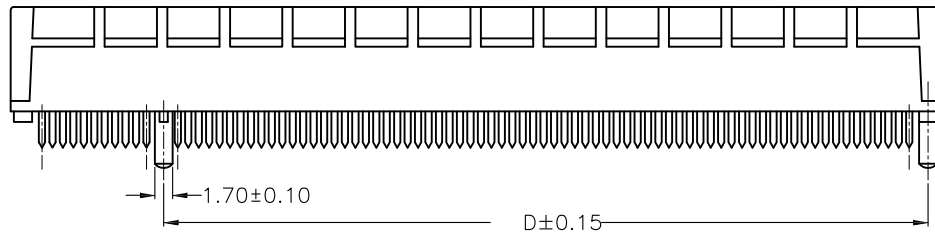

SECTION: A-A

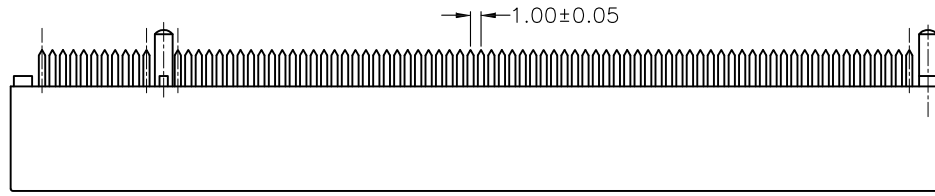

- Note:
- Electrical Performance
 - Dielectric Withstanding Voltage: 500V/AC For 1.0 Minute.
 - Contact Resistance: 30mΩ Max
 - Insulation Resistance: 1000MΩ Min
 - Mechanical Performance.
 - CONTACT INSERTION FORCE: 0.115Kg Max Per.Contact Pair.
 - CONTACT WITHDRAWAL FORCE: 0.015Kg Min Per.Contact Pair.
 - Terminal Retention Force (in housing): 0.5Kg Min per Terminal.
 - Material & Finish:
 - Housing: Glass Filled High Temperature Nylon, Black.
 - Contact Plating: Tin Plating At Solder Tail Area; Gold Plating At Mating Area, All Over Nickel Plating.
 - Environmental: Operating Temperature: -55°C~+85°C

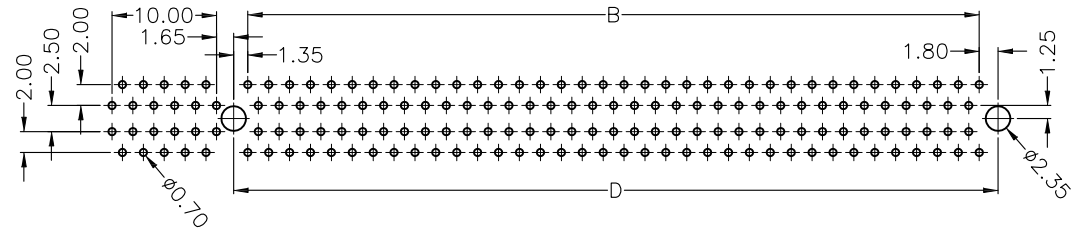

PCB LAYOUT

M Morecrafts Technology
 TEL: +886-2-2966-1326
 FAX: +886-2-2966-1352
 www.morecrafts.com.tw

PART NO.	PCI-10-XX	DRAWN	Andrew
DRAWING NO.	PCI-10-XX	CHECKED	Claudia
DATE	2014/02/10	APPROVED	Brian

TITLE:	PCI 1.0mm EXPRESS	REV.	A0	TOLERANCE	.X ±0.25 .XX ±0.20	SCALE	1:1	UNIT	mm	NO.	REV.	REVISION	DATE
--------	-------------------	------	----	-----------	-----------------------	-------	-----	------	----	-----	------	----------	------