NOTES:
Current Rating: 1A AC,DC
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 500V AC/minute
Temperature Range: -40°C ~ +105°C
Insulator: Nylon 6T, UL94V-0
Contact: Brass
RoHS Compliant

ORDER INFORMATION

P M 10 10 X 2 A/B/C - 2 XX X X

- P M: SMT Type
- 10: Pitch 1.0mm
- 10: Height=1.0mm
- X: G0:Gold Flash; G1:Gold 3u"; G2:Gold 5u"; G3:Gold 10u"; G4:Gold 15u"; G5:Gold 30u"
- 2: RoHS + NY 6T
- A/B/C: Customer Design Dimension
- 2: Dual Row
- XX: No. of Contacts Per Row
- X: T:Tube P:Cap+Tube R:Cap+Reel
- X: Blank: W/O Peg P:With Peg

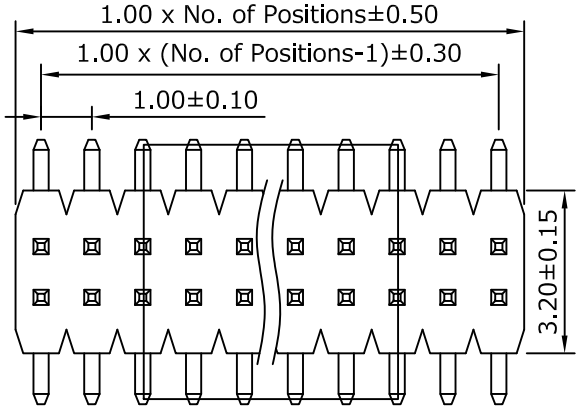

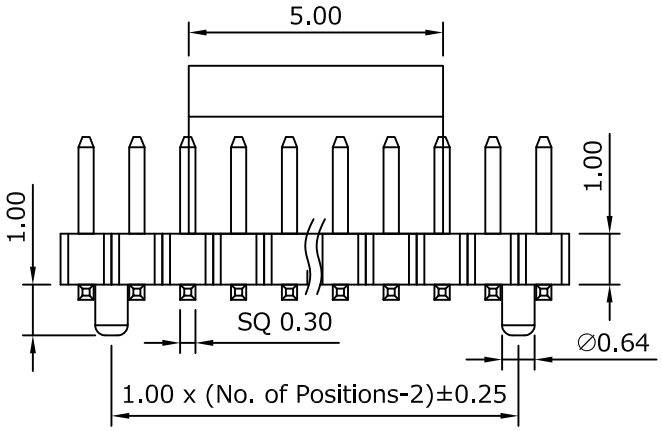

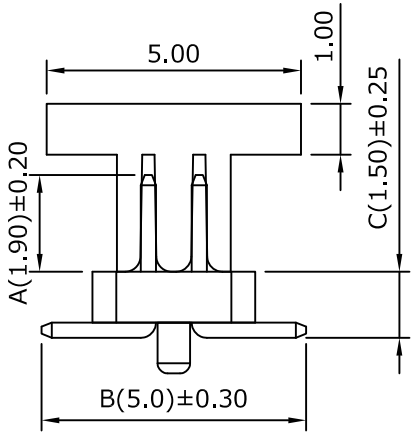

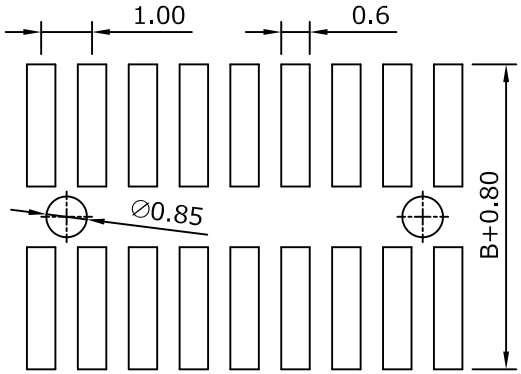

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Morecrafts Technology
TEL: +886-2-2966-1326
FAX: +886-2-2966-1352
www.morecrafts.com.tw

PART NO.	PM1010X2A/B/C-2XXXX	DRAWN	Andrew
DRAWING NO.	PM1010X2A/B/C-2XXXX	APPROVED	Brian
		DATE	2008/06/22

TITLE:	REV.	TOLERANCE	SCALE	UNIT	NO.	REV.	REVISION	DATE
Pin Header 1.0mm Plastic Height 1.0mm	A0	.X ±0.25 .XX ±0.20	NONE	mm				