
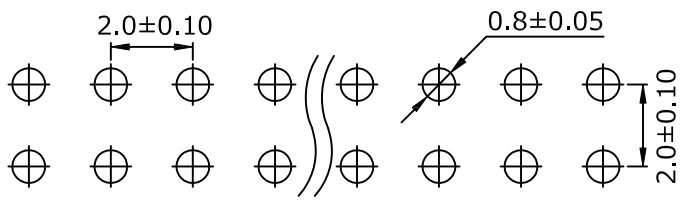

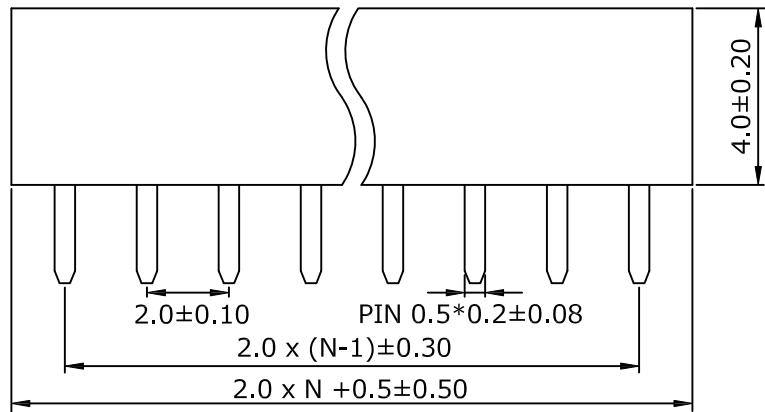
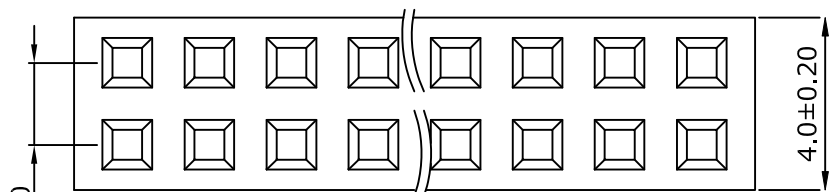


SPECIFICATIONS

Current Rating: 2AMP
 Contact Resistance: 20m Ω Max
 Insulation Resistance: 1000M Ω Min
 Withstanding Voltage: 500V AC for 1 minute
 Temperature Range: -40°C to +105°C
 Terminal : Phosphor Bronze
 Material: NY9T+30%G.F., UL94V-0

ORDER INFORMATION

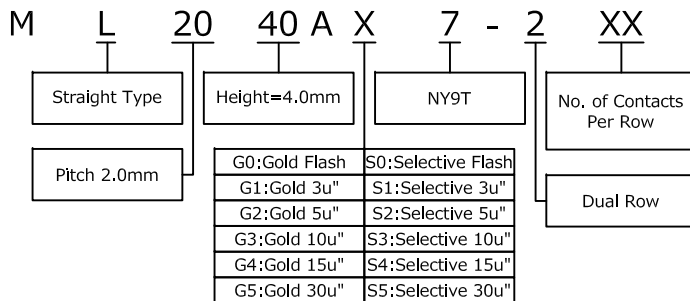

RECOMMENDED PCB LAYOUT

Morecrafts Technology
 TEL: +886-2-2966-1326
 FAX: +886-2-2966-1352
 www.morecrafts.com.tw

PART NO.	ML2040AX7-2XX	DRAWN	Andrew
DRAWING NO.	ML2040AX7-2XX	CHECKED	Claudia
DATE	2018/05/23	APPROVED	Brian

TITLE:	REV.	TOLERANCE	SCALE	UNIT	NO.	DESCRIPTION	DATE
Female Header 2.0mm plastic H=4.0mm	A0	.X ±0.25 .XX ±0.20	1:1	mm			