





Specifications

Current Rating: 7A AC,DC
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1000V AC/minute
 Temperature Range: -40°C ~ +105°C

Material

Insulator: LCP, UL94V-0
 Contact: Copper Alloy

ORDER INFORMATION

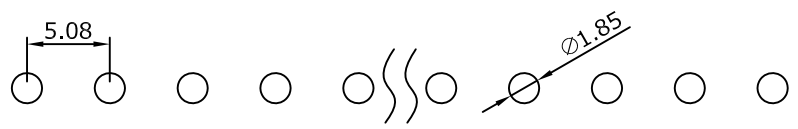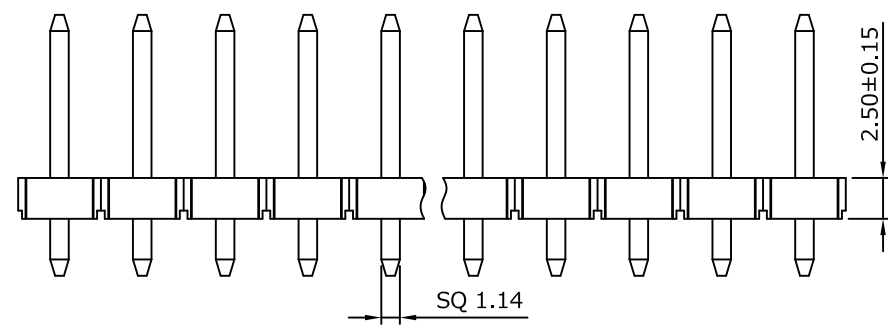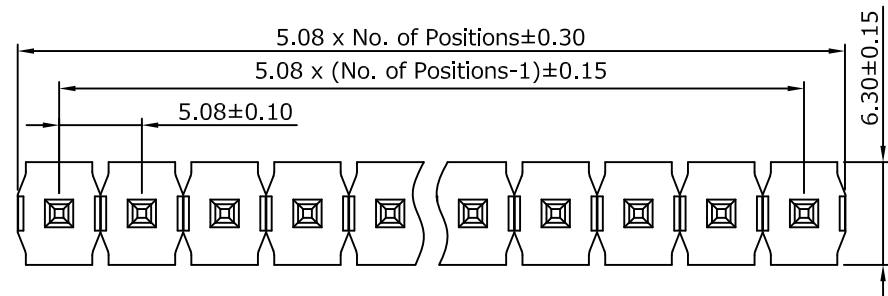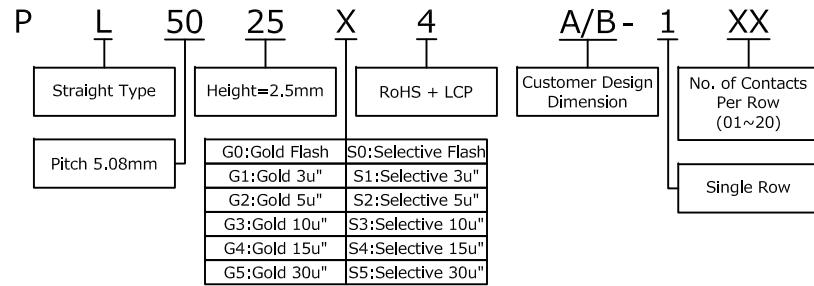

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

			<p>Morecrafts Tel: +886-2-2966-1326 Fax: +886-2-2966-1352</p>	品號 PART NO.	PL5025X4A/B-1XX	日期 DATA	2009/02/05			
				圖號 DRAWING NO.	PL5025X4A/B-1XX	繪圖 DRAWN	Sayid			
				客戶品號 CUSTOMER P/N		核對 APPROVED	Max			
REV.	DESCRIPTION	DATA	TITLE: Pin Header 5.08mm Plastic Height 2.5mm	REV. A	公差 TOLERANCE	.X ±0.25 .XX ±0.20	比例 SCALE	FREE	單位 UNIT	mm