
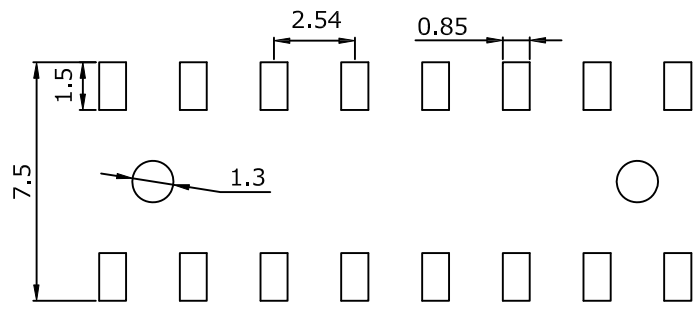
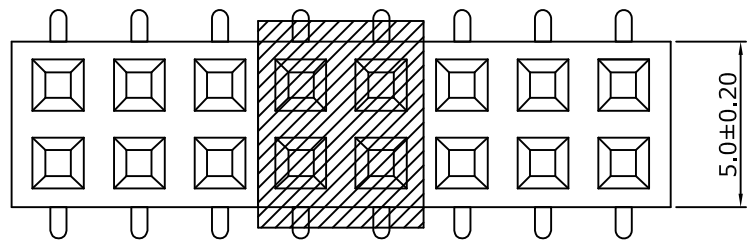




SPECIFICATIONS

Current Rating: 3Amps
 Contact Resistance: 20m Ω Max
 Insulation Resistance: 1000M Ω Min
 Withstanding Voltage: 500V AC for 1 minute
 Temperature Range: -40°C to +105°C
 Terminal : Cooper Alloy
 Insulator: NY6T+30%G.F., UL94V-0

ORDER INFORMATION

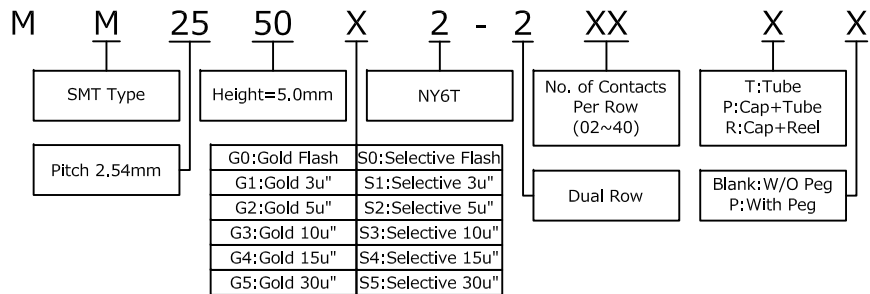

Recommended PCB Layout

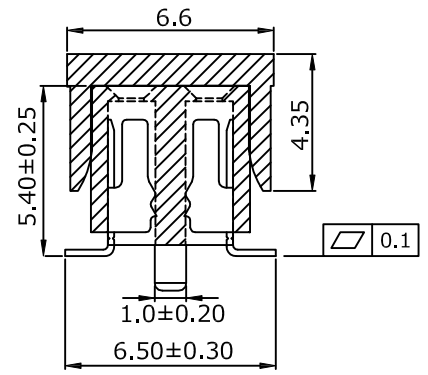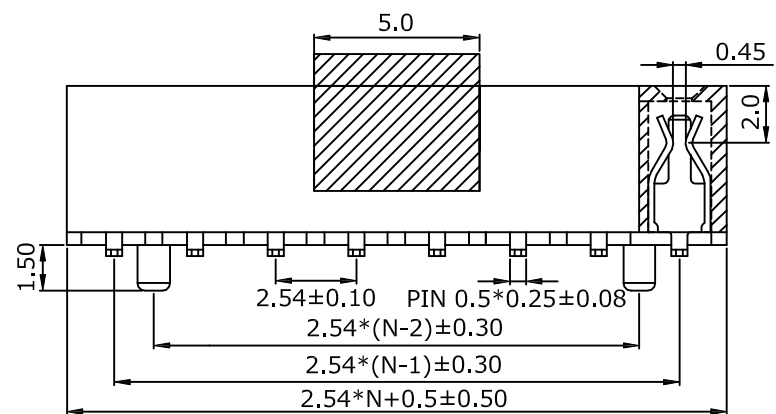

M Morecrafts Technology
 TEL: +886-2-2966-1326
 FAX: +886-2-2966-1352
 www.morecrafts.com.tw

PART NO.	MM2550X2-2XXXX	DRAWN	Andrew
DRAWING NO.	MM2550X2-2XXXX	CHECKED	Claudia
DATE	2015/09/24	APPROVED	Brian

TITLE:	Female Header 2.54mm H=5.0mm	REV.	A0	TOLERANCE	.X ±0.25 .XX ±0.20	SCALE	1:1	UNIT	mm	NO.	1	DESCRIPTION	Drawing updated & peg added	DATE	2019/5/30
--------	------------------------------	------	----	-----------	-----------------------	-------	-----	------	----	-----	---	-------------	-----------------------------	------	-----------